





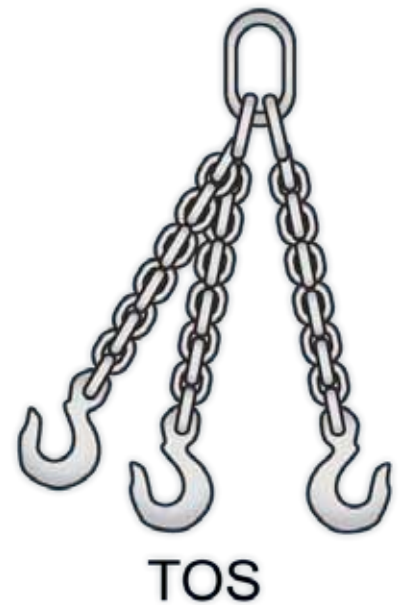


Triple Chain Sling with Master Link and Sling Hook

Grade 80 Working Load Limits in Pounds				
CHAIN SIZE		TRIPLE & QUAD SLING		
MM	IN.	 60°	 45°	 30°
7	9/32	9,100	7,400	5,200
8	5/16	11,700	9,500	6,800
10	3/8	18,400	15,100	10,600
13	1/2	31,200	25,500	18,000
16	5/8	47,000	38,400	27,100
20	3/4	73,500	60,000	42,400
22	7/8	88,900	72,500	51,300
26	1	123,900	101,200	71,500
32	1-1/4	187,800	153,400	108,400

Grade 100 Working Load Limits in Pounds				
CHAIN SIZE		DOUBLE SLING		
MM	IN.	 60°	 45°	 30°
7	9/32	11,200	9,100	5,400
8	5/16	14,800	12,100	7,500
10	3/8	22,900	18,700	13,200
13	1/2	32,000	31,800	22,500
16	5/8	58,700	47,900	33,900
20	3/4	91,700	74,900	53,000
22	7/8	110,900	90,600	64,000



Listed Working Load Limits apply only to normal conditions of use in straight configurations with equally loaded legs. For endless slings, WLL's of 75% of above-listed WLL's for the corresponding double leg sling are recommended.