


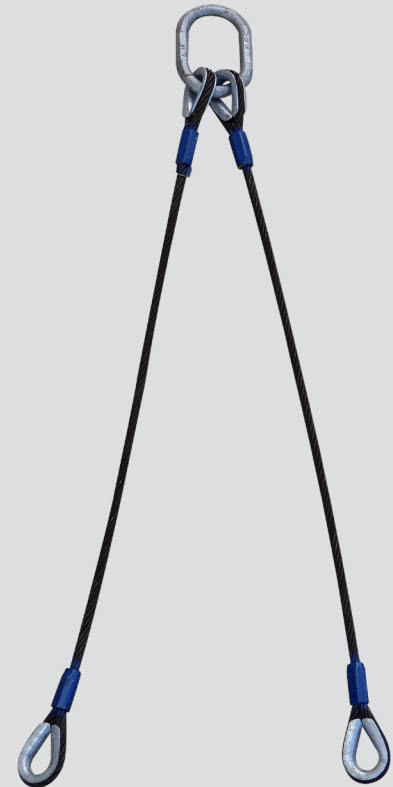




## TYPE 125 EIP IWRC: Mechanical Spliced Two Leg Spreaders

Rated Capacity - US Tons

|                        | Rope Dia. (") | RATED CAPACITY (Tons)   |   |   | Alloy Oblong | Alloy Hook |
|------------------------|---------------|---|---|---|--------------|------------|
|                        |               |  |  |  | Dia. (")     | WLL Tons   |
|                        |               | 60  | 45  | 30  |              |            |
| 6x19 OR<br>6x36<br>EIP | 1/4           | 1.1   | 0.91  | 0.65  | 0.50         | 1          |
|                        | 5/16          | 1.7   | 1.4   | 1.0   | 0.50         | 1          |
|                        | 3/8           | 2.5   | 2.0   | 1.4   | 0.50         | 1 1/2      |
|                        | 7/16          | 3.4   | 2.7   | 1.9   | 0.75         | 2          |
|                        | 1/2           | 4.4   | 3.6   | 2.5   | 0.63         | 3          |
|                        | 9/16          | 5.5   | 4.5   | 3.2   | 0.875        | 5          |
|                        | 5/8           | 6.8   | 5.5   | 3.9   | 1.0          | 5          |
|                        | 3/4           | 9.7   | 7.9   | 5.6   | 1.0          | 7          |
|                        | 7/8           | 13  | 11  | 7.6   | 1.25         | 11         |
| 1                      | 17            | 14  | 9.8   | 1.50  | 11           |            |
| 6x36 EIP               | 1 1/8         | 21  | 17  | 12  | 1.50         | 15         |
|                        | 1 1/4         | 26  | 21  | 15  | 1.75         | 15         |
|                        | 1 3/8         | 31  | 25  | 18  | 1.75         | 22         |
|                        | 1 1/2         | 37  | 30  | 21  | 2.0          | 22         |
|                        | 1 3/4         | 49  | 40  | 28  | 2.25         | 30         |
|                        | 2             | 63  | 52  | 37  | 2.5          | 37         |



Rated Capacities based on design factor of 5.  
Horizontal sling angles of less than 30° shall not be used.

