








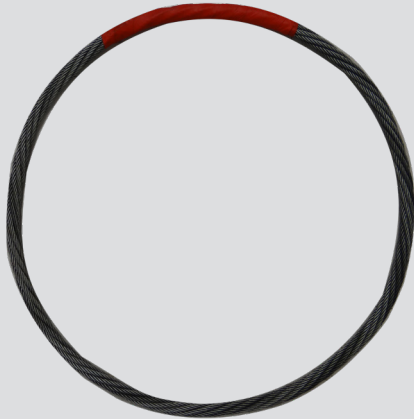

TYPE 210 EIP IWRC: Strand Laid Hand Splice Continuous Construction Grommet

Rated Capacity - US Tons



Sling Body Dia. (")	RATED CAPACITY - Tons						
			Basket Hitch				
							
Vertical	Choker	Vertical	60 °	45°	30°		
6X19 OR 6X36 EIP	1/4	0.94	0.66	1.9	1.6	1.3	0.94
	5/16	1.5	1	2.9	2.5	2.1	1.5
	3/8	2.1	1.5	4.2	3.6	3.0	2.1
	7/16	2.8	2	5.7	4.9	4.0	2.8
	1/2	3.7	2.6	7.3	6.4	5.2	3.7
	9/16	4.6	3.2	9.3	8.0	6.6	4.6
	5/8	5.7	4	11	9.9	8.1	5.7
	3/4	8.2	5.7	16	14	12	8.2
	7/8	11	7.7	22	19	16	11
	1	14	10	29	25	20	14
6X36 EIP	1 1/8	18	12	35	31	25	18
	1 1/4	21	15	43	37	30	21
	1 3/8	25	18	51	44	36	25
	1 1/2	30	21	60	52	42	30
	1 3/4	40	28	79	69	56	40
	2	50	35	101	87	71	50
	2 1/4	62	43	124	107	88	62
	2 1/2	75	52	149	129	106	75
	2 3/4	89	62	177	154	125	89
	3	104	73	207	180	147	104

Rated Capacities based on design factor of 5.
 Horizontal sling angles less than 30° shall not be used.
 Rated Capacities based on D/d ratio of 5.