




## TYPE SS15 T-304: Stainless Steel Sling Rated Capacity - US Tons

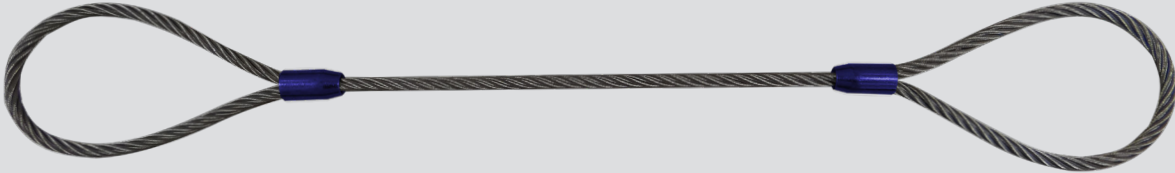

	Rope Dia. (")	Vertical	Choker Hitch	Basket Hitch			Eye Dimensions (")		Thimble Dimensions (")		Alloy Hook WLL Tons	
					60°	45°	30°	A	B	A		B
6X19 OR 6X36 EIP	1/4	0.61	0.45	1.2	1.1	0.86	0.61	2.0	4	0.88	1.63	1
	5/16	0.86	0.63	1.7	1.5	1.2	0.86	2.5	5	1.06	1.88	1
	3/8	1.1	0.84	2.3	2.0	1.6	1.1	3.0	6	1.13	2.1	1 1/2
	7/16	1.5	1.1	3.1	2.7	2.2	1.5	3.5	7	1.25	2.38	2
	1/2	2.2	1.6	4.3	3.8	3.1	2.2	4.0	8	1.5	2.75	3
	9/16	2.7	2.0	5	4.7	3.8	2.7	4.5	9	1.5	2.75	5
	5/8	3.3	2.5	7	5.8	4.7	3.3	5.0	10	1.75	3.25	5
	3/4	4.7	3.5	9	8.2	6.7	4.7	6.0	12	2.0	3.75	5
6X36 EIP	7/8	6.3	4.7	13	11	8.9	6.3	7	14	2.25	4.25	5
	1	8.1	6.0	16	14	11	8	8	16	2.5	4.5	11
	1 1/8	10	7.4	20	17	14	10	9	18	2.88	5.13	11
	1 1/4	12	9.1	25	21	17	12	10	20	2.88	5.13	15
	1 3/8	14	11	29	24	20	14	11	22	3.5	6.25	22
	1 1/2	17	13	34	29	24	17	12	24	3.5	6.25	22
	1 3/4	22	17	45	38	31	22	14	28	4.5	9.0	30
	2	28	21	57	48	39	28	16	32	6.0	12	37
2 1/4	35	25	69	57	49	33	18	36	7.0	14	45	

Rated Capacities Basket Hitch based on D/d ratio of 25 times the component rope diameter.

Rated Capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter.

Rated Capacities based on design factor of 5.

Horizontal sling angles less than 30° shall not be used.