


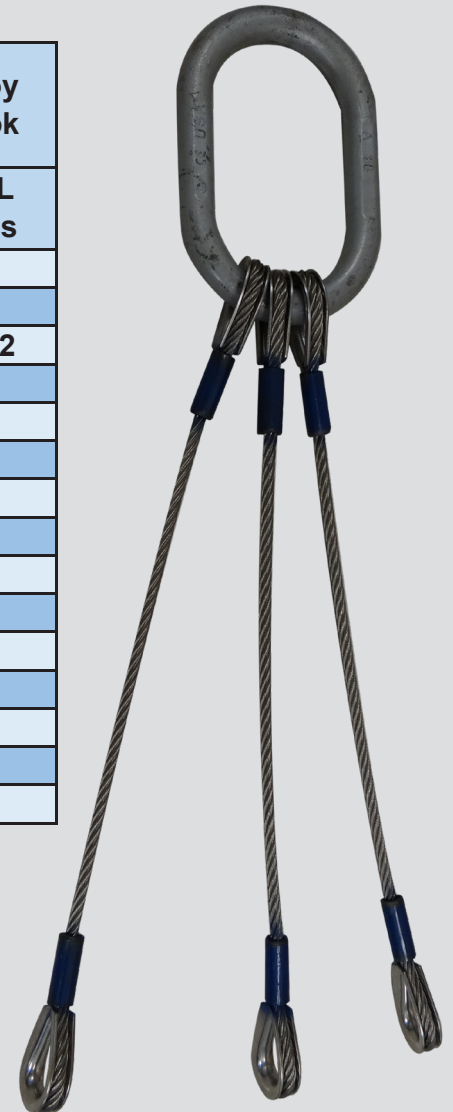




TYPE SS35 T-304: Three Leg Stainless Steel Sling Rated Capacity - US Tons

	Rope Dia. (")	RATED CAPACITY (Tons)			Alloy Oblong Diameter (")	Alloy Hook WLL Tons
						
		60°	45°	30°		
6X19 OR 6X36	1/4	1.6	1.3	0.91	0.75	1
	5/16	2.2	1.8	1.3	0.75	1
	3/8	3	2.4	1.7	0.875	1 1/2
	7/16	4	3.3	2.3	1.0	2
	1/2	5.6	4.6	3.2	1.0	3
	9/16	7.1	5.8	4.1	1.0	5
	5/8	8.6	7.1	5	1.0	5
	3/4	12	10	7.1	1.5	5
	7/8	16	13	9.5	1.75	5
	1	21	17	12	1.75	11
6X36	1 1/8	26	21	15	2	11
	1 1/4	31	25	18	2.25	15
	1 3/8	36	30	21	2.5	22
	1 1/2	43	35	25	2.5	22
	1 3/4	57	46	33	2.75	30



Rated Capacities based on design factor of 5.
Horizontal sling angles less than 30° shall not be used.



Master Link with
Sub-Assemblies Optional