


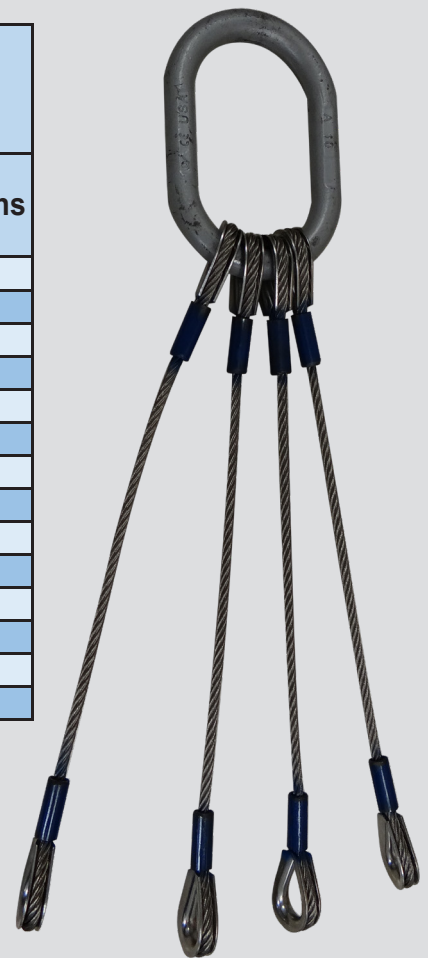




## TYPE SS45 T-304: Four-Leg Stainless Steel Sling

Rated Capacity - US Tons

	Rope Dia. (")	RATED CAPACITY (Tons)			Oblong Link	Alloy Hook
						
		60°	45°	30°	Diameter (")	WLL Tons
6X19 OR 6X36	1/4	2.1	1.7	1.2	0.75	1
	5/16	3	2.4	1.7	0.75	1
	3/8	3.9	3.2	2.3	0.875	1 1/2
	7/16	5.4	4.4	3.1	1.0	2
	1/2	7.5	6.1	4.3	1.0	3
	9/16	9.4	7.7	5.4	1.25	5
	5/8	12	9.4	6.7	1.25	5
	3/4	16	13	9.4	1.5	5
	7/8	22	18	13	1.75	5
6X36	1	28	23	16	2.0	11
	1 1/8	34	28	20	2.25	11
	1 1/4	41	34	24	2.5	15
	1 3/8	49	40	28	2.75	22
	1 1/2	58	47	33	3.0	22



Rated Capacities based on design factor of 5.  
Horizontal sling angles less than 30° shall not be used.



*Master Link with  
Sub-Assemblies Optional*

