

THE MORE YOU
TRUST AN ANCHOR,
THE MORE YOU
ENJOY THE VIEW.



Smart guys look at DBI-SALA™
anchorage connectors first.

In the excitement of the moment,
remember that each DBI-SALA™
anchorage connector has been
rigorously tested to meet or exceed
OSHA and ANSI standards. We offer
the most complete line of anchorage
connectors available today, so you'll
always find the best product to meet
the demands of your job.

Most Anchors Equipped with



TYPES OF ANCHORS

Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



GENERAL (ALL-PURPOSE)

Portable anchors used in a variety of applications. Many are "choker" style, designed to provide a safe and easy way to anchor a fall protection device to an overhead location that is beyond normal reach.



STEEL

Our anchors for steel are lightweight and easily installed. A variety of portable, permanent, mobile and fixed anchors are available for connection to I-beams and other steel structures.

CONCRETE

These rugged and extremely abrasive resistant portable and permanent anchors are specifically designed to be attached to concrete structures including walls, floors, decks and columns.



ROOF

A variety of portable and permanent roof anchors for residential and commercial, as well as for flat or sloped roofs, are available. These specialized anchors will keep you safe without causing damage to the structure.



SPECIALTY

Specifically designed to attach to challenging anchorage structures, these devices are unique. If you can't find a suitable anchor for your application, call us and we'll work together to provide a solution.

GENERAL ANCHORAGE CONNECTORS

Extremely versatile anchors are simply choked-off to the anchorage structure, to provide a fast and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.



1003000

WEB TIE-OFF ADAPTOR

Pass thru design. 1-3/4" polyester strength member with 3" wide polyester wear pad x 3 ft. (0.9m).

1003006 Web tie-off adaptor, pass thru type x 6 ft. (1.8m)

1002103 Adjustable web tie-off adaptor, pass thru type x 3 ft. (0.9m)

1002106 Adjustable web tie-off adaptor, pass thru type x 6 ft. (1.8m)

1002202

KEVLAR® TIE-OFF ADAPTOR

Kevlar® web is ideal for high heat environments, pass-thru type with 1-3/4" polyester strength member x 6 ft. (1.8m).

1002200 Kevlar® tie-off adaptor, pass thru type x 3 ft. (0.9m)


1002201 Kevlar® tie-off adaptor, pass thru type x 4 ft. (1.2m)

5900550

CABLE TIE-OFF ADAPTOR

Pass thru design. 7x19-3/8" (9.5mm) stainless steel cable with O-rings x 4 ft. (1.2m).

5900551 Cable tie-off adaptor, pass thru type x 6 ft. (1.8m)

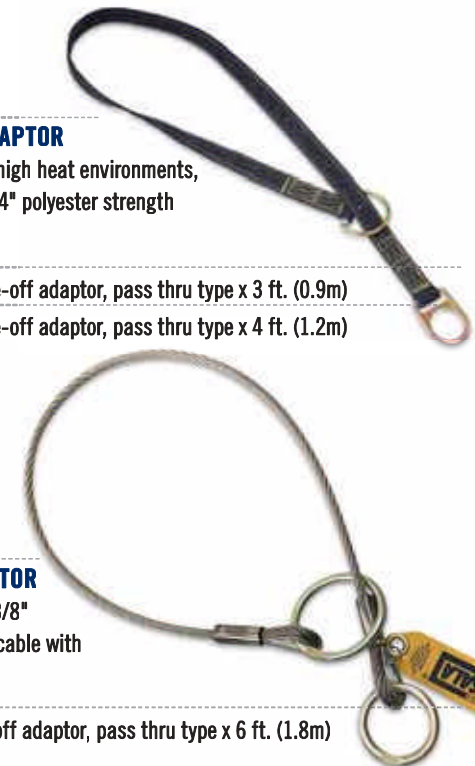

1201390

WEB SCAFFOLD CHOKER

Choker style attaches to 3" (76mm) diameter anchorage. 1" (25mm) polyester strength member x 17" (43cm).

1201391 Web scaffold choker x 24" (61cm)



SAFLOK™ CARABINERS

Saflok™ carabiners are the unsung heroes of most safety systems. They securely attach one component to another and offer maximum strength – 5,000 lb. (22kN) minimum breaking strength and 3,600 lb. (16kN) gate strengths. Designed for easy securing, they are self closing and self locking to keep all components of your safety system firmly attached, including you!

2000112

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 11/16" (17.5mm) opening.

2000113

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 1-3/16" (30mm) opening.

2000114

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 2-3/16" (55.5mm) opening.

2000200

SAFLOK™ CARABINER

Stainless steel carabiner with 3,600 lb. (16kN) self closing/locking gate, 11/16" (17.5mm) opening.

2000300

SAFLOK™ CARABINER

Steel carabiner with 3,600 lb. (16kN) self closing/triple-action locking gate, 2" (50.8mm) opening.

2000301

SAFLOK™ CARABINER

Stainless steel carabiner with 3,600 lb. (16kN) self closing/triple-action locking gate, 2" (50.8mm) opening.



STEEL ANCHORAGE CONNECTORS


Extremely versatile anchors for steel are lightweight and compact, providing an easy to install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.

2104700

GLYDER™ 2 SLIDING BEAM ANCHOR

Provides complete horizontal mobility on I-beams, attach overhead or at your feet (use with Force2™ shock absorbing lanyard when used at your feet).


- Wear pads eliminate metal-to-metal contact, for smooth operation
- Integrated ratcheting adjustment system for easy installation
- Dual beam grip adjustment prevents twisting and turning
- Extremely lightweight at only 3.7 lbs. (1.66kg)
- User capacity of 420 lbs. (189kg)
- Fits flange 3-1/2" to 14" wide and up to 1-1/4" thick

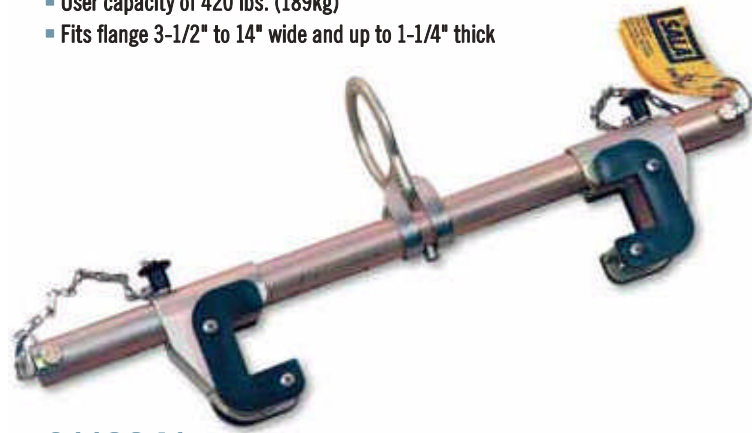

2110941

GLYDER™ SLIDING BEAM ANCHOR

The original Glyder™ has most of the features of Glyder™ 2, except the adjustment system is detent pin type and fits larger beam sizes. Fits flange 6"-18" wide and up to 2-1/2" thick.

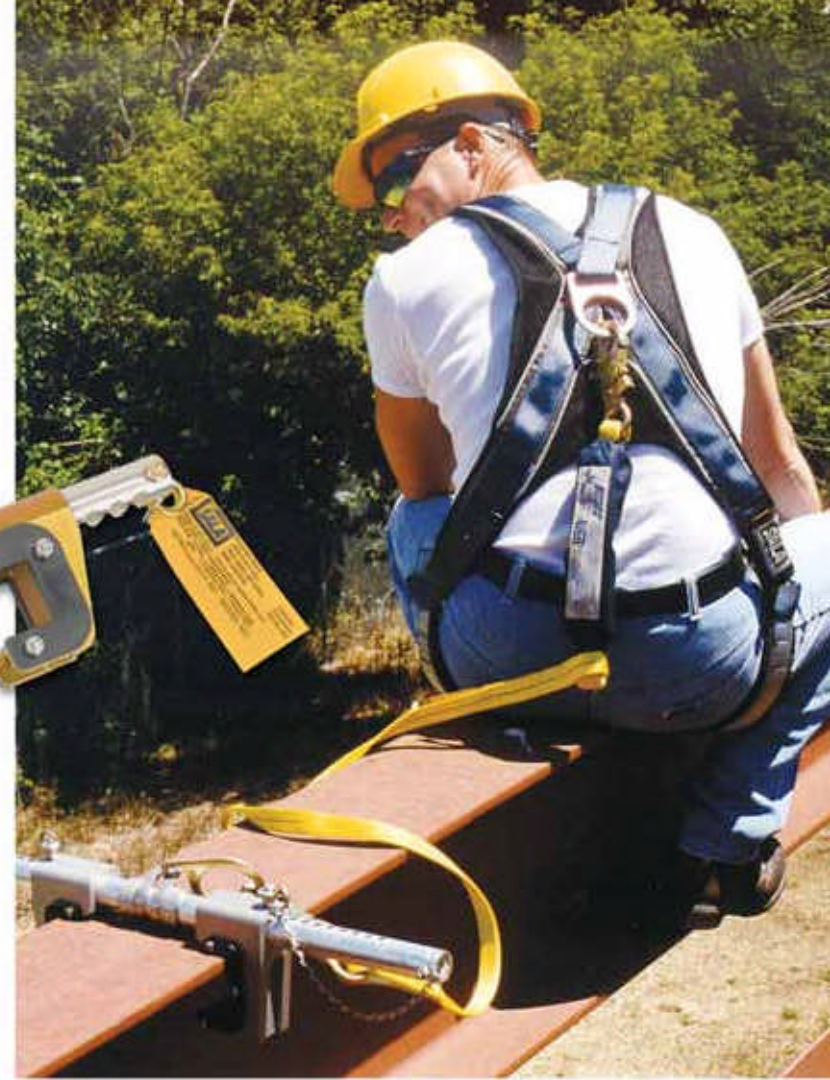

2108406

FIXED BEAM ANCHOR

It installs in seconds to the beam structure in any orientation, with final tightening using a built-in adjustment handle. Ideal as a single-person anchor point or as end-anchors for a Sayline™ horizontal lifeline system. Fits up to 1-1/2" thick beam flange, 2-1/2" to 12" wide.

2108407 Fixed Beam Anchor, fits up to 1-1/2" thick x 2-1/2"-18" wide beam flange

2108408 Fixed Beam Anchor, fits up to 1-1/2" thick x 2-1/2" -24" wide beam flange

2108410 Fixed Beam Anchor, fits up to 1/2" to 2-1/2" thick x 12"- 36" wide beam flange

2103143

TROLLEY FOR I-BEAM

The trolley is for use with self retracting lifelines on horizontal beams and has been engineered for ease-of-use and superior performance. Glides effortlessly along the beam and provides horizontal mobility.

- Attachable anywhere along beam, including midpoint
- Non-corrosive double-shielded wheel bearings are maintenance free
- Trolley Guards protect the wheels from damage and keep beam clear of debris
- Fits 3" to 8" flange width thickness up to 11/16"

2103147 Trolley for I-Beam, all stainless steel, fits 3" to 8" flange width thickness up to 11/16"

2101630

D-RING ANCHORAGE PLATE

The D-ring anchorage plate can be bolted or welded to a structure, offering a compact, reliable connection point for your fall protection system.

- Two 1/2" diameter attachment holes
- Cadmium plated steel D-ring
- 304 stainless steel anchorage plate
- Plate size: 1/4" x 2" x 4-1/2"



2101634 D-ring Anchorage Plate with cadmium plated steel D-ring, raw steel anchorage plate

2101636 D-ring Anchorage Plate with 304 stainless steel D-ring and anchorage plate

2101638 D-ring Anchorage Plate with 316 stainless steel D-ring and anchorage plate

2104550

STEEL PLATE ANCHOR

This plate anchor offers a compact, reliable attachment to 3/8" to 1" thick plate steel for connecting your lanyard, vertical lifeline system or self retracting lifeline.

- Easy to use set-screw design ensures positive and safe connection
- Complete with integral D-ring tie-off point
- Durable, corrosion resistant zinc plated steel construction



CONCRETE ANCHORAGE CONNECTORS

Extremely versatile anchors for concrete are lightweight and compact, providing an easy-to-install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.

2100085

SAFLOK™ CONCRETE WEDGE ANCHOR

Portable and reusable concrete anchor installs quickly and easily using standard concrete tools, providing a fast and safe tie-off point.

- Exclusive quick-release button for fast removal
- Unique forged connection ring provides a compatible tie-off point
- Shielded load cable and chock release cables
- Exclusive pivoting easy-grip handle



2100101

SAFLOK™ TOGGLE ANCHOR

Portable and reusable anchor installs in just seconds to concrete or steel for horizontal, vertical, or overhead applications, providing a compatible, fast and safe tie-off point.

- Activator cable provides toggle mode selection (Open or Lock)
- Toggle position indicator visually notifies user if locked or unlocked
- Swiveling D-ring provides a compatible tie-off point



2100050

CONCRETE ANCHOR STRAP

Our disposable concrete anchor strap provides a temporary anchorage on concrete forms and is extremely easy to install and use.

- Loop slips over rebar, then concrete is poured over
- When no longer needed, simply cut strap and discard
- Durable 1-3/4" polyester construction x 3-1/2 ft. (1m)
- Full length wear pad for abrasion resistance
- D-ring provides compatible tie-off point



2100053 Concrete anchor strap with D-ring, 48" (1.2m)

2100061 Concrete anchor strap, no D-ring, 3-1/2 ft. (1m)



2104560

CONCRETE D-RING ANCHOR

A simple, versatile and safe concrete anchor solution for use in temporary or permanent applications provides a safe tie-off point.

- Reusable D-ring assembly
- Rugged design for harsh environments
- Safe "hook-up" indicator notifies user of proper installation
- Install into 11/16", 18mm or 3/4" holes – only standard drill bits needed



2104561 Concrete D-ring Anchor with 5 additional bolts

2104562 Concrete D-ring Anchor with 11 additional bolts

2100066 10-pack of replacement bolts for concrete D-ring anchor

2101004

CONCRETE DETENT ANCHOR

A versatile, simple and safe concrete anchor utilizing pre-installed sockets enables the user to connect and disconnect from the anchorage by simply pressing a button.

- Use for floor, wall or ceiling type applications
- Provides convenient tie-off points wherever needed
- Push-button operation for fast and easy operation
- Socket includes cover cap to hide recess, blending into the decor



2101000 Concrete detent socket and cap only

2101002 Concrete detent pin only




2105500

CONCRETE LEADING EDGE TRIPOD

This anchor provides workers with a quick, easy and safe anchorage point during pre-cast concrete work.

- For use with 3504500 Ultra-Lok™ Leading Edge SRL (see page 57)
- Swivels 360 degrees offering complete freedom of movement
- Also use as end anchors for a temporary horizontal lifeline
- Built-in ratchet securing system – no special tools required

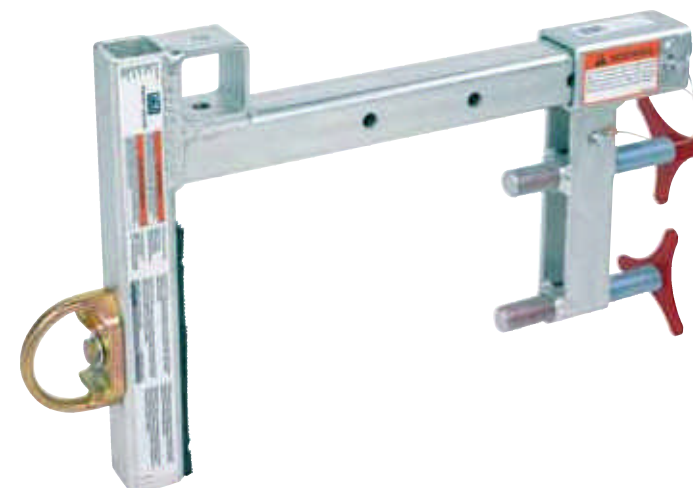


8523178

CONCRETE PARAPET ANCHOR

Portable anchorage connector developed for use in locations where a low parapet wall provides an anchor site for a shock absorbing lanyard or self retracting lifeline.


- Non-penetrating design eliminates site damage
- Adjustment range 1" to 14.5" wide
- No tools required for installation

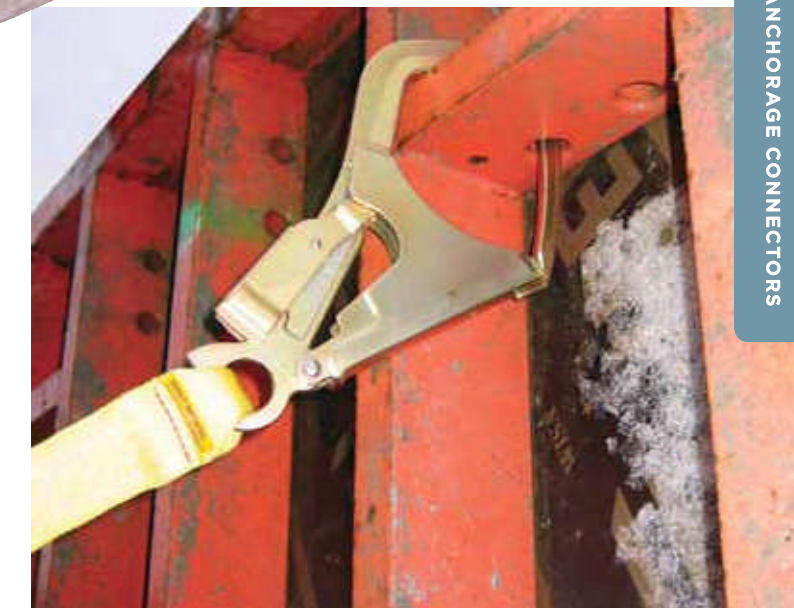

1231305

SAFLOK MAX™ WEB ANCHOR

Anchor can be directly connected to many concrete wall forms to provide a tie-off point for your system. Web anchor strap with large opening, Saflok Max™ hook at one end, D-ring at other x 1.5 ft. (45cm).

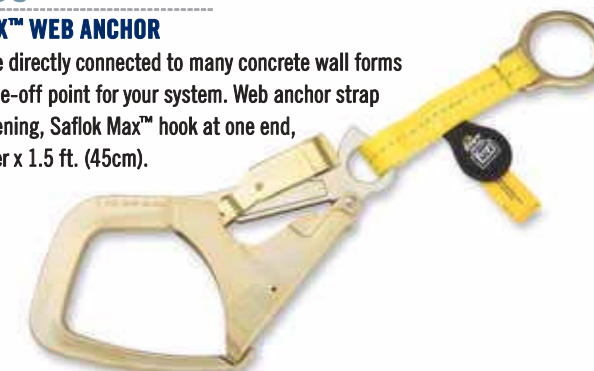



ROOF ANCHORAGE CONNECTORS

When you're out on the wood or steel roof of a residential or commercial structure, whether flat or sloped, your fall protection system needs specialized components to keep you safe without causing damage to the structure. Our easy-to-use kits and anchorage devices provide the perfect solution and meet the latest OSHA and ANSI standards.

2104168

ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job. Kit includes:

- Reusable Roof Anchor (2103673)
- Full Body Harness (1103513)
- Rope Adjuster with Shock Absorbing Lanyard (1224005)
- Lifeline x 50 ft. (1202794)
- Counterweight (5901583)
- Carrying Bag (9511597)



2104169 Roofer's Fall Protection Kit with 2103676 Roof Anchor

7611904

ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job. Kit includes:

- Two Reusable Roof Anchors (2103673)
- Full Body Harness (1103513)
- 50 ft. Sayflin™ Horizontal Lifeline System (7600511)
- Rope Adjuster with Shock Absorbing Lanyard (1224005)
- Lifeline x 50 ft. (1202794)
- Counterweight (5901583)
- Carrying Bag (9511597)



7600511 Roofer's Fall Protection Kit with 50 ft. Sayflin™ system, two reusable roof anchors and bag



2103690


3-MAN REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection for up to three workers on sloped wood roofs. For ultimate mobility, use with 30 ft. 3504430 or 50 ft. 3504450 Ultra-Lok™ SRL (order separately).

2105683

REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped or flat wood and metal decking. For use with 30 ft. 3504430 or 50 ft. 3504450 Ultra-Lok™ SRL (order separately). Also can be used as end-anchors for horizontal lifeline system.

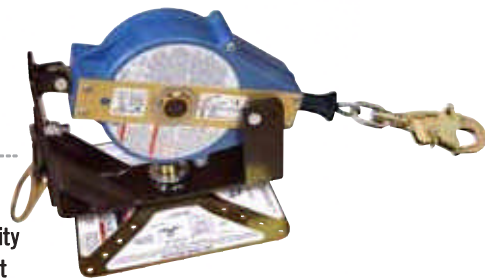

3505694

REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped wood roofs. Includes 30 ft. 3504430 Ultra-Lok™ SRL.

3505695 Reusable swiveling roof anchor with 50 ft. 3504450 Ultra-Lok™ SRL



2103673

PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with twelve 16D nails or six 1/4" x 2-1/2" bolts. Can be used with horizontal lifeline systems for added versatility.



2103676

PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with 20 ea. 16D nails. Simple hinge style design is extremely easy to transport, install, dismantle and store.



2103677

PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with three grade 5, 5/16" x 3" min. lag screws. Compact design is extremely easy to transport, install, dismantle and store.



2104541

DETACHABLE ROOF ANCHOR WITH FLASHING

Removable D-ring assembly allows you to leave behind the clamp assembly and then shingle over it, reusing the D-ring at another location. Fits 2x6 to 2x8 roof truss, joist or rafter.



2104540 Detachable Roof Anchor, fits 2x4

2104542 Detachable Roof Anchor, fits 2x10 to 2x12

2103670

PERMANENT ROOF ANCHOR WITH FLASHING AND CAP

Clamps onto roof truss up to 2" x 8" size and comes complete with flashing to prevent leakage and D-ring cap for aesthetics. Provides fall protection during initial construction as well as for future homeowner.




2103671 Permanent Roof Anchor with Flashing and Cap, fits 2x10 to 2x12

2103675

PORTABLE/REUSABLE STANDING SEAM ROOF ANCHOR

Attaches to sloped or flat structural standing seam roofs. Telescoping adjustment fits 24", 30", 32" and 36" seam spacing. Swivels 360 degrees and designed for use with Ultra-Lok™ Leading Edge SRL (order SRL separately).

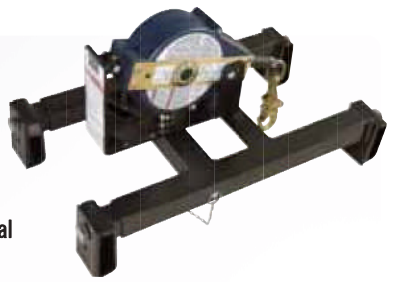

7255000

FREESTANDING COUNTERWEIGHT ANCHOR

Freestanding system is easily placed on top of the roof surface to provide a tie-off point for one worker. Complete with 16 ea. 45 lb. (20kg) counterweights and installs without penetrating the roof sheathing.



7200439 45 lb. (20kg) Single Replacement Counterweight

2100075

ROOF TOP ANCHOR FOR METAL, CONCRETE AND WOOD

Permanent anchor for 24 gauge or thicker corrugated metal decking with ribs 10" to 20" apart, 5/8" CDX plywood or concrete. Set-up for one or two users and incorporates load distributing design.



2100076

ROOF TOP ANCHOR FOR MEMBRANE AND BUILT-UP TYPES


Fastens through (up to 5.5") the membrane, insulation and into the metal sheathing, wood sheathing or concrete. The base is covered with the roofing material and weather sealed together. Incorporates load distributing design.



2100077 Roof Top Anchor for Membrane and Built-Up Roofs with 10.5" bolt kit

evolution™ HORIZONTAL LIFELINE SYSTEMS

These permanently installed systems are custom engineered for your jobsite. Ideal for roof areas that must be accessed on a regular basis, the system provides complete freedom of movement, hands free mobility and fall protection for multiple workers. Whether your need is for a straight, curved or combination system, we can custom design the perfect solution for your commercial roof application – call us today!



SPECIALTY ANCHORAGE CONNECTORS

These specialty anchors combine ease-of-use and strength to provide fall protection safety to match the task. They all have been rigorously tested to meet or exceed industry standards.

MOBI-LOK™ SELF CONTAINED VACUUM ANCHOR SYSTEMS

Provides a tie-off point on virtually any smooth, non-porous surface simply by flipping a switch and waiting for the green light.

- Fall arrest tested and approved, meeting OSHA, CE and AS/NZS
- Lightweight design (under 20 lbs.) for easy transport
- Fail-safe back-up systems with audio alarms and vacuum level indicator
- Rubber seals secure anchor without damaging surface
- Can be used with horizontal lifeline systems for added mobility for two workers

2200095

MOBI-LOK™ FOR GENERAL INDUSTRY

Self-contained vacuum anchor assembly with bottle attachment and carrying case. It is powered up with a single, on-board 48-cubic-inch compressed gas bottle (order separately) or a large capacity detached bottle, or shop air. Unit can also power one additional secondary pad.

2200094 Mobi-Lok™ general industry self contained vacuum anchor without bottle attachment

2200096 Mobi-Lok™ general industry self contained vacuum anchor secondary pad

2200108

MOBI-LOK™ FOR AVIATION INDUSTRY

Self-contained vacuum anchor assembly with bottle attachment and carrying case. It is powered up with a single, on-board 48-cubic-inch compressed gas bottle (order separately) or a large capacity detached bottle, or shop air. Unit can also power one additional secondary pad.

- EPDM rubber seals are Skydrol resistant.
- Aviation rated electronics are intrinsically safe.

2200107 Mobi-Lok™ aviation industry self-contained vacuum anchor without bottle attachment

2200109 Mobi-Lok™ aviation industry self-contained vacuum anchor secondary pad

Mobi-Lok™ 4-man 100 ft. (30m) and 150 ft. (45m) systems also available featuring twin horizontal lifeline systems.

MOBI-LOK™ ACCESSORIES

2200078

Compressed gas cylinder



2200086

Fill station, fills compressed gas cylinder 2200078 from bulk nitrogen cylinder.



2200130

Secondary pad hose x 50 ft. (15m). For connecting secondary pads to self-contained vacuum anchor.



1225013

FORCE2™ shock absorbing lanyard with web loop choker at one end, aluminum carabiner at other x 6 ft. (1.8m).



2200400

Sayline™ horizontal lifeline system x 40 ft. (12m). For connection between two or more pads to create continuous protection for two workers.



2200094



2200108



SAFLOK™ POLE ANCHOR SYSTEM 2104801

Provides pole climber with 100% fall protection, allowing installation of anchor and lifeline to top of pole from the ground. Quickly and safely climb prior to connecting work positioning system.

- Compatible with most hot stick poles
- Includes anchor tube with installation/removal tool
- 80 ft. (24m) 5/8" (16mm) dielectric rope and two carabiners
- Rope grab with shock absorbing lanyard
- Chain tensioner, web loop and carrying bag



2104800 Saflok™ pole anchor system with anchor tube, installation/removal tool, 80 ft. (24m) 5/8" (16mm) dielectric rope, carabiner, rope grab with shock absorbing lanyard and carrying bag.



2100090

PERIMETER LIMITER LEADING EDGE ANCHOR

Freestanding, non-penetrating anchor is ideal for concrete decking construction and provides overhead anchorages for up to 2 users.

- Large foam filled trailer tires won't go flat and will provide easy movement
- Rotating 7.5 ft (2.3m) mast and anchorage arm for added freedom of movement
- Pre-drilled holes for accessory rescue winches or jobsite boxes
- Additional weights and taller mast can be added for jobsite flexibility

2100091 9-1/2 ft. mast for perimeter limiter

FIRST-MAN-UP™ REMOTE ANCHORING SYSTEM



2104527

Provides a safe means to anchor a fall protection device to an overhead location beyond normal reach.

- Pole adjusts from 6 to 12 ft. (1.8 to 3.6m)
- Tie-off adapter tool for installation of anchorage device
- Hook attachment tool for installation of 3,600 lb. gated snap hooks
- Tie-off adapter x 3 ft. (0.9m) and carrying bag

2104528 First-Man-Up™ System with 8-16 ft. (2.4-4.8m) adjustable pole

2104529 Snap hook connector tool for 3,600 lb. gated hooks

2104530 First-Man-Up™ System, 6-12 ft. (1.8-3.6m) adjustable pole with original and 3,600 lb. gated hook tools

2104531 First-Man-Up™ System, 8-16 ft. (2.4-4.8m) adjustable pole with original and 3,600 lb. gated hook tools



2100080

DOOR/WINDOW JAMB ANCHOR

Non-penetrating anchor is lightweight and portable, requiring no tools for attachment. Adjustable opening ranging from 21.5" to 51.5" (54.6cm to 130.8cm). Rated for 3,600 lbs. (16kN).

