




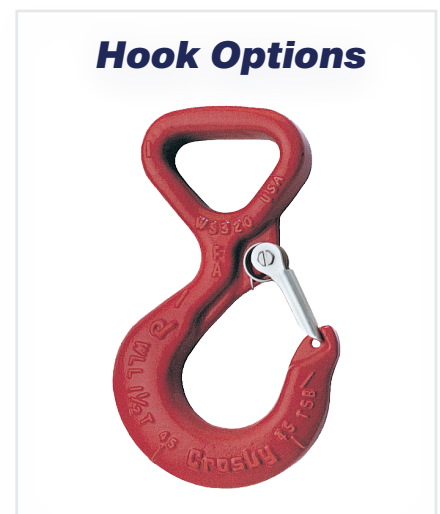
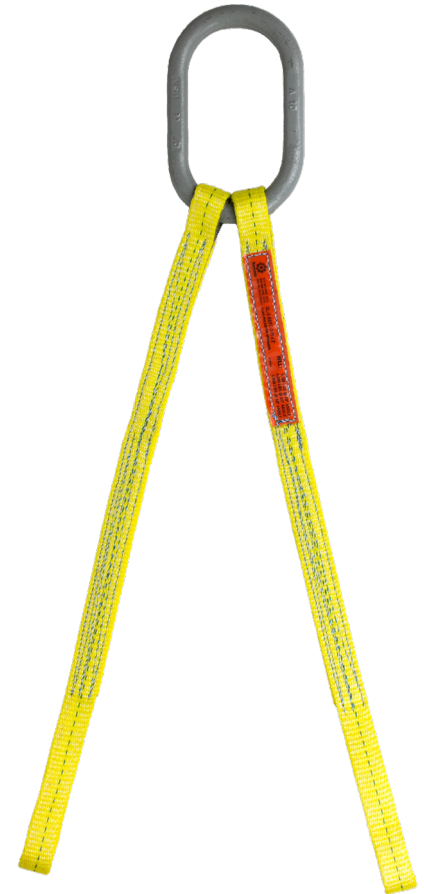
TYPE 12 TWO LEG SPREADER

WARNING

See page 12-14 for inspection and removal criteria

Nylon or polyester two leg spreaders are useful when the load is equipped with permanent lifting attachments. For such applications, two leg spreaders are lightweight, easy to use, and economical.

Stock #	Width (")	Ply	Degrees			Master Link Size (")	Hook Size (WLL)
			60° 	45° 	30° 		
OL-2-EEFC-1-91	1	1	2,750	2,250	1,600	3/4	1.5t Web Sling Hook
OL-2-EEFC-2-91	1	2	5,350	4,350	3,100	3/4	1.5t Web Sling Hook
OL-2-EEFC-1-92	2	1	5,350	4,350	3,100	3/4	1.5t Web Sling Hook
OL-2-EEFC-2-92	2	2	10,700	8,750	6,200	1	3t Web Sling Hook
OL-2-EEFC-1-93	3	1	8,100	6,600	4,700	1	3t Web Sling Hook
OL-2-EEFC-2-93	3	2	15,200	12,400	8,800	1	5t Web Sling Hook
OL-2-EEFC-4-93	3	4	28,400	23,150	16,400	1-1/4	*
OL-2-EEFC-1-94	4	1	10,700	8,750	6,200	1	3t Web Sling Hook
OL-2-EEFC-2-94	4	2	19,050	15,550	11,000	1	5t Web Sling Hook
OL-2-EEFC-4-94	4	4	35,300	28,850	20,400	1-1/2	*



*Available when a connection fitting is used for attaching the hook to the eye. Please contact our sales team for additional information.

Additional sizes available upon request. Please contact our sales team for special requirements.



TYPE 13
THREE LEG SPREADER

! WARNING ! See page 12-14 for inspection and removal criteria

Nylon or polyester three leg spreaders are useful when the load is equipped with permanent lifting attachments. For such applications, three leg spreaders are lightweight, easy to use, and economical.



Stock #	Width (")	Ply	Degrees			Master Link Size (")	Hook Size (WLL)
			60° 	45° 	30° 		
OL-3-EEFC-1-91	1	1	4,150	3,350	2,400	3/4	1.5t Web Sling Hook
OL-3-EEFC-2-91	1	2	8,050	6,550	4,650	1	1.5t Web Sling Hook
OL-3-EEFC-1-92	2	1	8,050	6,550	4,650	3/4	1.5t Web Sling Hook
OL-3-EEFC-2-92	2	2	16,100	13,150	9,300	1	3t Web Sling Hook
OL-3-EEFC-1-93	3	1	12,200	9,950	7,050	1-1/2	3t Web Sling Hook
OL-3-EEFC-2-93	3	2	22,850	18,650	11,400	1-1/2	5t Web Sling Hook
OL-3-EEFC-4-93	3	4	42,550	34,750	24,600	1-1/2	*
OL-3-EEFC-1-94	4	1	16,100	13,150	9,300	1-1/2	3t Web Sling Hook
OL-3-EEFC-2-94	4	2	28,550	23,300	16,500	1-1/2	5t Web Sling Hook
OL-3-EEFC-4-94	4	4	52,950	43,250	30,600	2	*

Hook Options

*Available when a connection fitting is used for attaching the hook to the eye. Please contact our sales team for additional information.

Additional sizes available upon request. Please contact our sales team for special requirements.




TYPE 14 FOUR LEG SPREADER




WARNING

See page 12-14 for inspection and removal criteria

Nylon or polyester four leg spreaders are useful when the load is equipped with permanent lifting attachments. For such applications, four leg spreaders are lightweight, easy to use, and economical.

Stock #	Width (")	Ply	Degrees			Master Link Size (")	Hook Size (WLL)
			60° 	45° 	30° 		
OL-4-EEFC-1-91	1	1	5,500	4,500	3,200	1-1/4	1.5t Web Sling Hook
OL-4-EEFC-2-91	1	2	10,700	8,750	6,200	1-1/4	1.5t Web Sling Hook
OL-4-EEFC-1-92	2	1	10,700	8,750	6,200	1-1/4	1.5t Web Sling Hook
OL-4-EEFC-2-92	2	2	21,450	17,500	12,400	1-1/4	3t Web Sling Hook
OL-4-EEFC-1-93	3	1	16,250	13,250	9,400	1-3/4	3t Web Sling Hook
OL-4-EEFC-2-93	3	2	30,450	24,850	17,600	1-3/4	5t Web Sling Hook
OL-4-EEFC-4-93	3	4	56,800	46,350	32,800	2	*
OL-4-EEFC-1-94	4	1	21,450	17,500	12,400	2	3t Web Sling Hook
OL-4-EEFC-2-94	4	2	38,050	31,100	22,000	2	5t Web Sling Hook
OL-4-EEFC-4-94	4	4	70,600	57,700	40,800	2-1/2	*

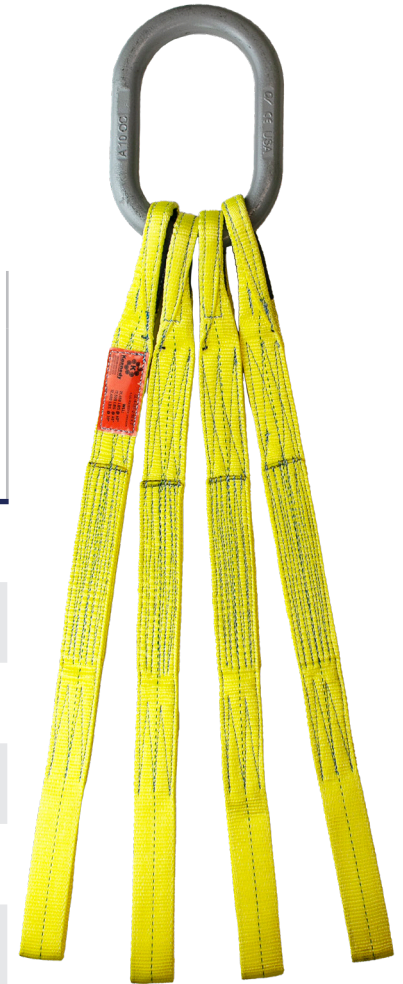

Hook Options



*Available when a connection fitting is used for attaching the hook to the eye. Please contact our sales team for additional information.

Additional sizes available upon request. Please contact our sales team for special requirements.