
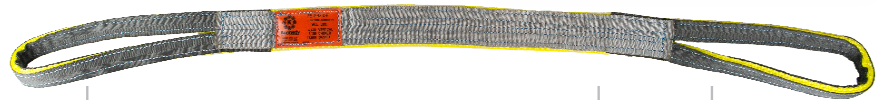


## TYPE 6 REVERSED EYE

An exceptionally durable sling that features full body and eye protection. The eye openings are 90 degrees to the sling body for tighter choker hitches and easy vertical and basket hitch rigging.

## TYPE 7 FLAT EYE

Flat eye slings have the same construction as Type 6, but with eyes in line with the sling body. These slings allow rigging through tight spaces and easy removal from under loads. Ideal for choker and basket hitches.

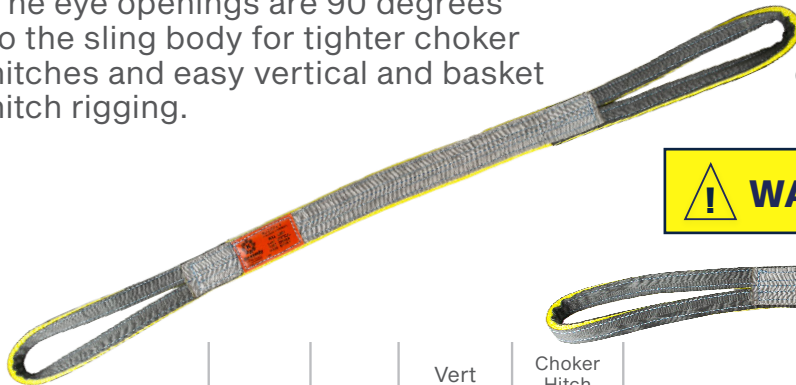

**! WARNING !** See page 12-14 for inspection and removal criteria

Stock #*	Width (")	Ply	Vert	Choker Hitch	Basket Hitch				Eye Width (")	Eye Length (")
					Degrees					
					90°	60°	45°	30°		
-1-92	2	1	3,200	2,550	6,400	5,500	4,500	3,200	1	9
-2-92	2	2	6,200	4,950	12,400	10,700	8,750	6,200	1	12
-3-92	2	3	8,200	6,600	16,400	14,100	11,550	8,200	1	12
-4-92	2	4	11,000	8,800	22,000	19,050	15,550	11,000	1	12
-1-93	3	1	4,600	3,650	9,200	7,950	6,500	4,600	1-1/2	12
-2-93	3	2	9,400	7,500	18,800	16,250	13,250	9,400	1-1/2	12
-3-93	3	3	12,300	9,800	24,600	21,300	17,350	12,300	1-3/4	12
-4-93	3	4	16,500	13,200	33,000	28,550	23,300	16,500	1-3/4	12
-1-94	4	1	6,200	4,950	12,400	10,700	8,750	6,200	1	12
-2-94	4	2	12,400	9,900	24,800	21,450	17,500	12,400	2	12
-3-94	4	3	16,500	13,200	33,000	28,350	23,250	16,500	2	18
-4-94	4	4	22,000	17,600	44,000	38,100	31,100	22,000	2	18
-1-96	6	1	9,400	7,500	18,800	16,250	13,250	9,400	1 1/2	12
-2-96	6	2	17,600	14,050	35,200	30,450	24,850	17,600	1 1/2	18
-3-96	6	3	24,700	19,800	49,400	42,450	34,800	24,700	3	24
-4-96	6	4	32,900	26,300	65,800	56,950	46,500	32,900	3	28

Rated capacities are in pounds. \*Use prefix "FE" for Flat Eye and "RE" for Reversed Eye stock numbers